


K42 - Series Scrubbers



Tank Material:	Poly 5/16" (7.9mm)		
Chassis Construction:	3/16" Steel (4.8mm) Powder Coated Steel		
Front Wheels (Diameter x Width):	10" x 3" (25 x 7cm) - Non-Marking Grey		
Rear Casters (Diameter x Width):	12 x 3" (6.4 x 3.5cm) - Non-Marking Grey		
Length x Width x Height	67 x 29 x 60 in *		
<small>*Dimensions listed are for the largest width deck configuration and squeegees removed from the machine</small>	170 x 74 x 152 cm *		
Scrub Motor(s):	(2x) 0.75 hp / 559 watts		
Brush RPM:	270 rpm		
System Voltage:	24 VDC		
Standard Battery:	240ah WET		
Battery Run Time:*	Up to 4 Hours		
Charger:	Onboard CE & CEC 27A		
Traction Drive System:	0.75hp - All Gear / Sealed (559 watts)		
Solution Tank Capacity:	40 gal / 151 L		
Solution Flow / Filter:	0 - 0.6 GPM / Stainless Inline (0 - 2.3 LPM)		
Recovery Tank Capacity:	42 gal / 159 L		
Vacuum Motor:	0.8 hp / 24V / 3 Stage / 640 watts		
Vacuum Water Lift:	70" / 178 cm / 70 cfm		
Squeegee:	37 in (94 cm)	41 in (104 cm)	41 in (104 cm)
Sound Levels:**	66 dBA**		
Productivity - Theoretical:***	38,500 ft2/hr 3,576 m2/hr	44,000 ft2/hr 4087 m2/hr	35,750 ft2/hr 3,321 m2/hr
Productivity - Practical:***	18,000 ft2/hr 1,672 m2/hr	20,500 ft2/hr 1,904 m2/hr	19,500 ft2/hr 1,811 m2/hr

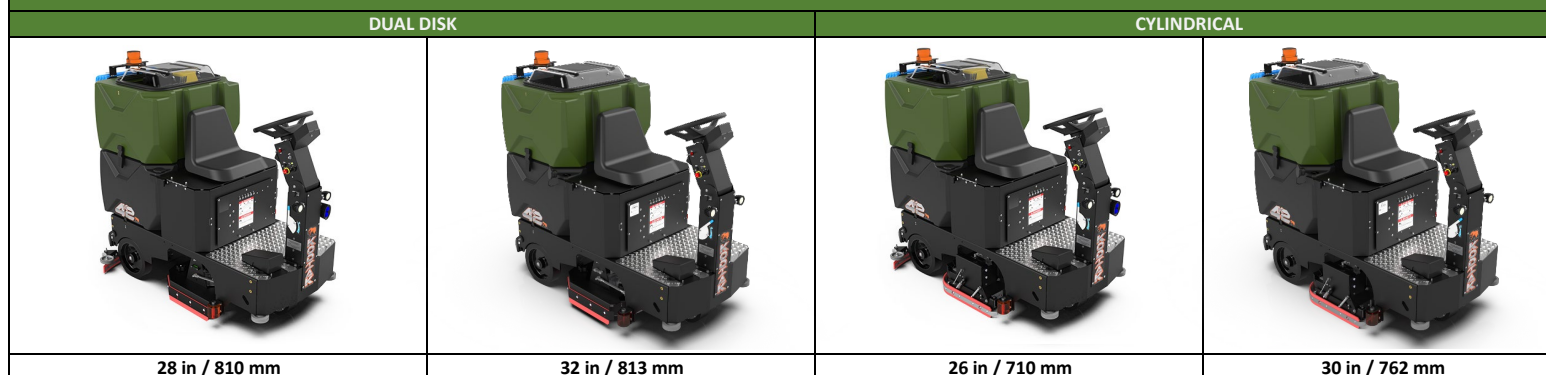

Location:
Kodiak Cleaning Equipment
1711 South Street
Racine, WI
53404

Phone:
262-833-4025

Email:
customerservice@kodiakequip.com
Website:
www.kodiakequip.com

Specifications subject to change without notice.
Always refer to the manual for detailed information on safety, operation, maintenance, and options.
Pressure and all options off.

***Productivity is based off of ISSA 2010 Cleaning Times